

# TEAMTEC INCINERATORS

Market leaders since 1972 - More than 11 000 units sold worldwide



OG200CS with a sluice for continuous feeding of solid waste. Capacity: 465 kW

## TEAMTEC Incinerator model OG200C

With its sturdy and compact design and high performance the **OG200C** is one of our most popular models and an *obvious first choice* for solving the waste treatment onboard medium-sized vessels.

### COMPACT DESIGN

The TEAMTEC high capacity incinerator models have one of the world's **smallest footprints and overall size**. The incinerators can easily be installed in a corner. Our incinerators are made from high quality marine components only.

### AUTOMATIC CONTROL

TEAMTEC incinerators are all controlled by a state-of-the-art PLC ensuring a **simple and reliable operation, maximum capacity utilisation and minimum fuel consumption**.

**Minimum attendance** is needed during operation and remote supervision is possible.


### LOW OPERATION COSTS

Our unique high temperature cyclone burning principle ensures that all the incinerators in TEAMTEC product range can incinerate sludge oil (waste oil) with water content up to 50% without using support fuel, leaving our incinerators as one of the most **economical** incinerators on the market.

TEAMTEC incinerators have **no strainers or filters** in the sludge oil system and this in addition to several other advantages keeps the maintenance costs to an absolute minimum.

### MODULAR CONSTRUCTION

All our incinerators are of a **modular construction** and can, if required, be delivered as a flat-packed unit for assembling onboard the vessel/installation – no parts are bigger than a normal ship door. No welding is needed. This construction also eases and benefits the life-time maintenance works.



MED APPROVED

## TECHNICAL DATA – OG200C model:


Version :	C	CS	CW	CSW	CI*	CIS*
Calorific capacity:	400 000 kcal/h 465 kW	400 000 kcal/h 465 kW	400 000 kcal/h 465 kW	400 000 kcal/h 465 kW	541 900 kcal/h 630 kW	541 900 kcal/h 630 kW
Sludge oil capacity **:	53 l/h	53 l/h	N/A	N/A	70 l/h	70 l/h
Bilge water capacity:	N/A	N/A	N/A	N/A	127 l/h	127 l/h
Solid waste capacity:	400 l/load (52 kg IMO***)	20-50 kg/h	400 l/load (52 kg IMO***)	20-50 kg/h	400 l/load (52 kg IMO***)	20-50 kg/h
Feeding sluice:	-	Yes	-	Yes	-	Yes

\* With TEAMTEC water injection system. \*\* IMO-defined sludge oil, 20% water content. \*\*\* IMO-defined type II waste

## ALL VERSIONS:

All versions (except CW and CSW) burn simultaneously sludge oil and solid waste.

TEAMTEC incinerators are designed and certified in compliance with the IMO resolution MEPC 76 (40) and IMO MARPOL ANNEX VI.

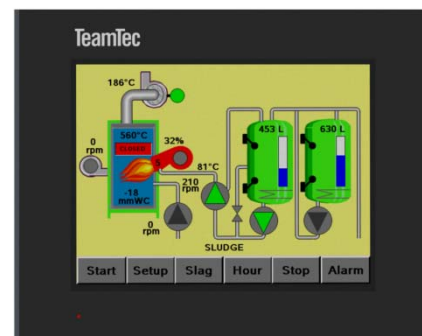

PLC colour touch screen panel as standard

## OPTIONS:

- Skid/base mounted units
- Containerized units
- Remote control panel / slave panel
- Sludge oil and diesel oil tanks
- Diesel oil transfer and booster pumps
- Sludge tank level indicator in operator display
- Heat tracing control for the sludge circulation line
- Frequency controlled flue gas fan
- Flue gas stack components
- Solutions for ambient temp. above 55°C
- Project versions

## BILGE WATER INJECTION:

As an option the incinerator can be equipped with TEAMTEC bilge water injection system to reduce the load on the Oily Water Separator by utilizing the heat from the sludge oil combustion. No additional diesel oil consumption. With PLC controlled injection of the water you achieve:

- Safe disposal of contaminated water
- Increased sludge capacity (ref. table)
- Reduced NOx emission - verified by DNV

Bilge Water injection is approved by major classification societies.

Quick and simple upgrading of existing TEAMTEC incinerators is available.

TG5.2 – Aug, 2017